

Benefits – Continuous bleeding and venting valve EB 6.32

Sturdy and simple valve mechanism

Reliable function, easy-to-maintain, can be disassembled without any specialist knowledge

1

Deep-drawn stainless steel (1.4404 / 316L), corrosion resistant, lightweight and compact

Long operational lifespan, manageable installation, minimum space required

2

Internal parts and float stainless steel (1.4404 / 316L)

Resistant to pressure and corrosion, max. operational life-span, long service intervals

3


Suitable for higher pressures

4

Various connection possibilities: DIN-, ANSI-flanges, socket connection ...

No adapters or fitting pieces required

5

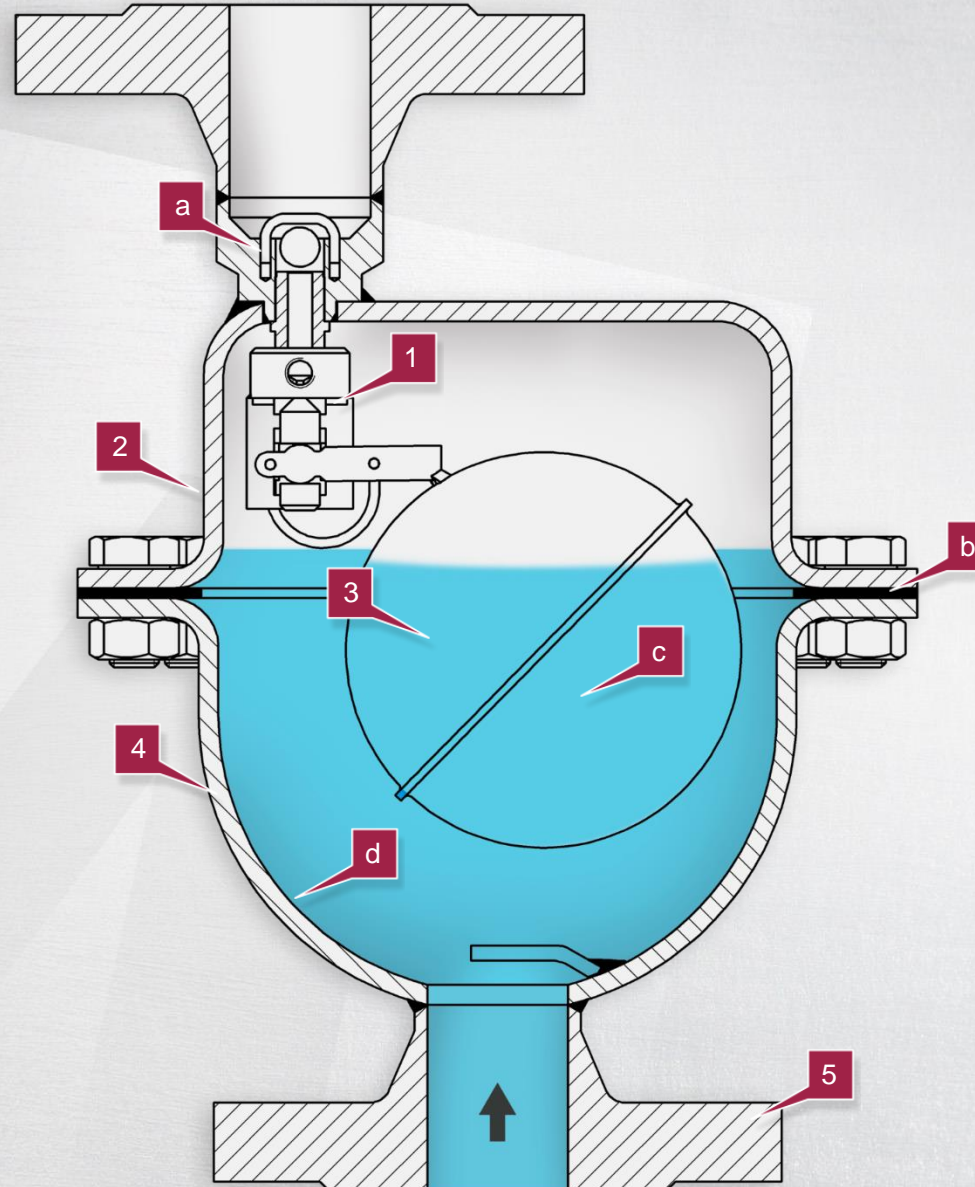

Optionen

Non-return valve to prevent venting

a

Optional elastomer selection

Suitable for ozone, FDA compliant ...

b

Float adapted to medium density

c

Special coating

Suitable for corrosive fluids

d

Vorteile – Be- und Entlüfter für Dauerbetrieb EB 6.32

